




**Part Number:** **T50-10**  
Revision 20160713 - Generated 2016-Aug-15



<b>OD</b>	(nom. - bare core) (max. - after coating)	12.70 mm 13.21 mm	0.500 in 0.520 in
<b>ID</b>	(nom. - bare core) (min. - after coating)	7.70 mm 7.19 mm	0.303 in 0.283 in
<b>Ht</b>	(nom. - bare core) (max. - after coating)	4.83 mm 5.33 mm	0.190 in 0.210 in
<b>Mass</b>	(approximate)	1.8 grams	
<b>Magnetic Dimensions</b>	A <sub>e</sub> - Eff. Mag. Cross Section	0.112 cm <sup>2</sup>	
	L <sub>e</sub> - Eff. Mag. Path Length	3.19 cm	
	V <sub>e</sub> - Eff. Core Volume	0.358 cm <sup>3</sup>	
	WA - Min. Eff. Window Area	0.406 cm <sup>2</sup>	
	sa - Surface Area	6.44 cm <sup>2</sup>	
<b>Inductance</b>	μ <sub>i</sub> (reference)	6	
	A <sub>L</sub> value (nominal)	3.1 nH/N <sup>2</sup>	
	Test Winding	N=35, #24 AWG	
	Frequency	1 MHz	
	Voltage on Agilent 4284A	1.0 V	
<b>Core Loss &amp; Q</b>	A <sub>L</sub> tolerance	±5%	
	Core Loss(mW/cm <sup>3</sup> )=	$\frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$	
	where B <sub>pk</sub> expressed in gauss, f expressed in hertz, and:	a=4.00E+09, b=3.00E+08, c=2.70E+06, d=8.00E-16	
	Q test winding	N=35, #24 AWG	
	Q frequency	9 MHz	
<b>DC Saturation</b>	Q min on HP4342A	158	
	%μ <sub>i</sub> =	$\frac{1}{a + b \cdot H^c} + d$	
	where H expressed in oersteds, and:	a=1.00E-02, b=5.54E-09, c=1.69, d=0.00	
	H <sub>DC</sub>	200 Oe	
	Percent Initial Perm.(nom.)	99.6%	
<b>Coating/Pkg</b>	Percent Initial Perm.(min.)	99.4%	
	Coating Type:	Black/Clear Epoxy Paint	
	Voltage Breakdown (min.)	500 Vrms, 60Hz	
	Limit	0.1 mA, 5 s	
<b>Winding Table</b>	Package Quantity	6,000 Pcs/Box	
	Wire Size	AWG	16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36
<b>Single Layer</b>	mm	1.250, 1.000, 0.800, 0.630, 0.500, 0.400, 0.315, 0.250, 0.200, 0.160, 0.125	
	Turns	12, 15, 20, 25, 32, 41, 51, 64, 81, 101, 127	
<b>Full Winding</b>	Rdc(Ω)	3.2 m, 6.4 m, 13.5 m, 26.8 m, 54.6 m, 111.3 m, 220.2 m, 439.4 m, 884.5 m, 1.8, 3.5	
	Turns	12, 19, 29, 45, 70, 108, 168, 259, 401, 621, 962	
	Rdc(Ω)	3.2 m, 8.1 m, 19.6 m, 48.3 m, 119.5 m, 293.2 m, 725.3 m, 1.8, 4.4, 10.8, 26.6	

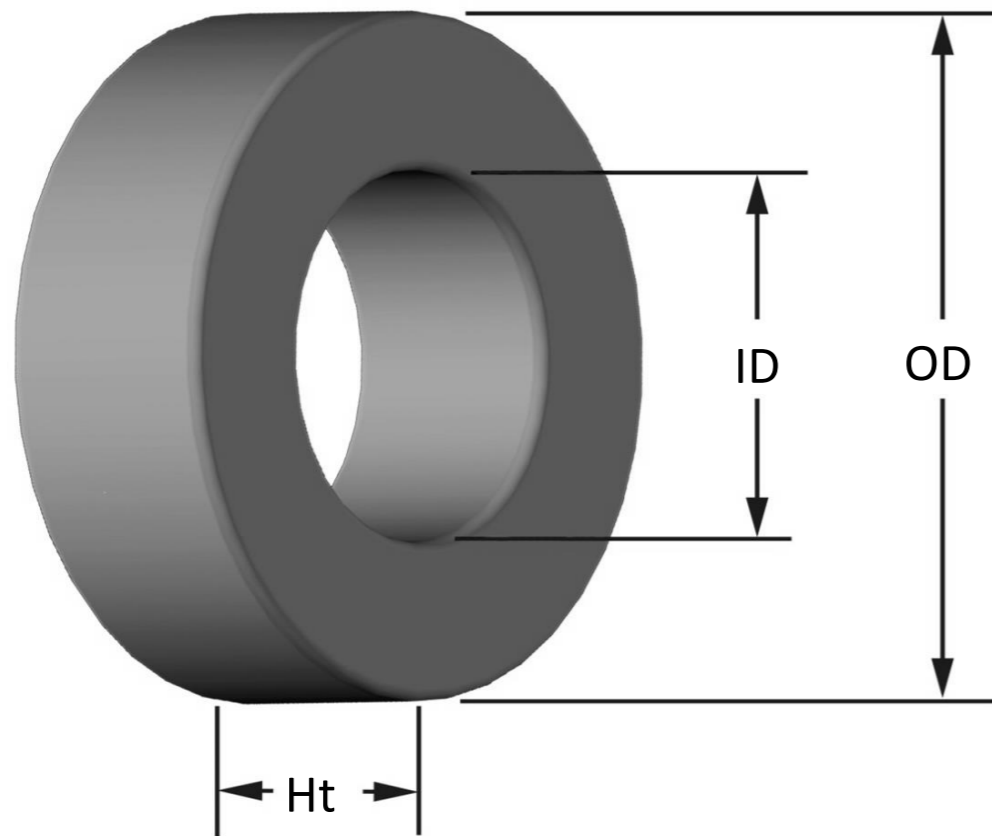